



Residual Buoyancy Meter (local) - M0037

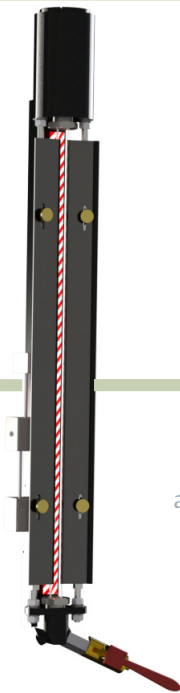

- mechanical, unmagnetic, sea water resistant, maintenance free
- shock and vibration resistant
- EMC safe
- with vent cock M0057
- with illuminated scale (white)
- adjustable scales

application shipbuilding, naval shipbuilding
medium water, sea water

Specifications			
connection	M18x1,5		
connection of vent cock	M16x1,5		
	*other connections on request		
connection position	bottom, sideways		
mounting position	90°		
nominal pressure	PN 5		
electrical data	24 VDC		
	0,125A/3W		
	*other lamps on request		
Technical Limitations			
measuring range	min		max
	3,8m		18m
medium temperature		15°C	
operation temperature	0 °C		50 °C
relative humidity			alternating 80%-100%
temperature influence			±0,4% FSO / 10K
weight	15 kg		
Material			
support	steel		
wetted parts	bronze, glass, synthetics		

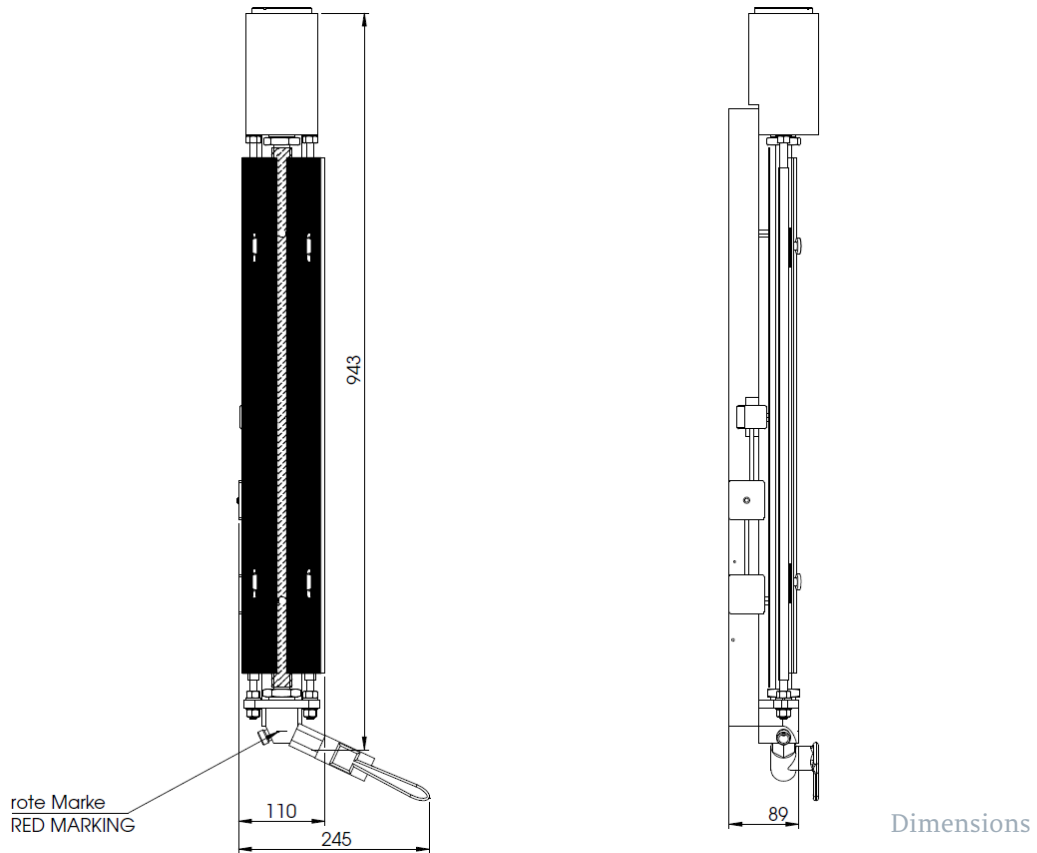

Colours

casing	black	RAL 9005	
	grey	RAL 7037	
scale background	white	RAL 9003	
	black	RAL 9005	
scale labels	fluorescent	UVG 75 green	
	yellow	RAL 1021	
	white	RAL 9003	
	fluorescent	UVG 75 green	
	black	RAL 9005	

*other colours on request